

# Short link chain for lifting purposes — Safety —

**Part 6: Chain slings — Specification for  
information for use and maintenance to  
be provided by the manufacturer**

The European Standard EN 818-6:2000 has the status of a  
British Standard

ICS 53.020.30

## National foreword

This British Standard is the official English language version of EN 818-6:2000.

The UK participation in its preparation was entrusted to Technical Committee MHE/1, Chains and fittings, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

### Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the BSI Standards Catalogue under the section entitled “International Standards Correspondence Index”, or by using the “Find” facility of the BSI Standards Electronic Catalogue.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

### National annex NA (informative)

In the UK, the Lifting Operations and Lifting Equipment Regulations 1998 (LOLER) require that accessories for lifting such as chain and chain slings, are thoroughly examined by a competent person at either 6 month intervals, or in accordance with a scheme of examination drawn up by a competent person.

**Compliance with a British Standard does not of itself confer immunity from legal obligations.**

### Summary of pages

This document comprises a front cover, an inside front cover, the EN title page, pages 2 to 13 and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

This British Standard, having been prepared under the direction of the Engineering Sector Committee, was published under the authority of the Standards Committee and comes into effect on 15 April 2000

© BSI 04-2000

### Amendments issued since publication

Amd. No.	Date	Comments

English version

## Short link chain for lifting purposes — Safety — Part 6: Chain slings — Specification for information for use and maintenance to be provided by the manufacturer

Chaînes de levage à maillons courts — Sécurité —  
Partie 6: Elingues en chaînes — Spécification pour  
l'information sur l'utilisation et la maintenance qui  
doit être fourni par le fabricant

Kurzgliedrige Rundstahlketten für Hebezwecke —  
Sicherheit — Teil 6: Anschlagketten — Festlegungen  
zu Informationen über Gebrauch und  
Instandhaltung, die vom Hersteller zur Verfügung zu  
stellen sind

This European Standard was approved by CEN on 6 May 1999.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

**CEN**

European Committee for Standardization  
Comité Européen de Normalisation  
Europäisches Komitee für Normung

**Central Secretariat: rue de Stassart 36, B-1050 Brussels**

## Foreword

This European Standard has been prepared by Technical Committee CEN/TC 168, Chains, ropes, webbing, slings and accessories — Safety, the Secretariat of which is held by BSI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by July 2000, and conflicting national standards shall be withdrawn at the latest by July 2000.

This European Standard has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For relationship with EU Directive(s), see informative annex ZA, which is an integral part of this standard.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

The other parts of EN 818 are:

- *Part 1: General conditions of acceptance;*
- *Part 2: Medium tolerance chain for chain slings — Grade 8;*
- *Part 3: Medium tolerance chain for chain slings — Grade 4;*
- *Part 4: Chain slings — Grade 8;*
- *Part 5: Chain slings — Grade 4;*
- *Part 7: Fine tolerance chain for hoists, Grade T (Types T, DT and DAT).*

Annexes A and B of this European Standard are for information only.

## Contents

	Page
Foreword	2
Introduction	3
1 Scope	3
2 Normative references	3
3 Terms and definitions	3
4 Hazards	3
5 Safety requirements	4
Annex A (informative) Guidance to assist the manufacturer to prepare documented information for the use and maintenance of chain slings	5
Annex B (informative) Bibliography	13
Annex ZA (informative) Relationship of this European Standard with EU Directives	13

## Introduction

This European Standard has been prepared to be a harmonized standard to provide one means of complying with the essential safety requirements of the Machinery Directive and associated EFTA regulations.

The extent to which the hazards are covered is indicated in the scope.

## 1 Scope

This part of EN 818 specifies the information on use and maintenance to be provided by the manufacturer with chain slings conforming to EN 818-4 and EN 818-5.

NOTE Certain clauses are relevant to component parts of chains and accessories conforming to EN 818-2, EN 818-3 and EN 1677.

Annex A is informative, and provides some of the detailed information for use and maintenance which may be appropriate.

The hazards covered by this part of EN 818 are identified in clause 4.

## 2 Normative references

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to, or revisions of, any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

EN 292-2:1991/A1:1995, *Safety of machinery — Basic concepts — General principles for design — Part 2: Technical principles and specifications (Amendment 1:1995)*.

EN 818-1, *Short link chain for lifting purposes — Safety — Part 1: General conditions of acceptance*.

EN 818-2, *Short link chain for lifting purposes — Safety — Part 2: Medium tolerance chain for chain slings — Grade 8*.

EN 818-3, *Short link chain for lifting purposes — Safety — Part 3: Medium tolerance chain for chain slings — Grade 4*.

EN 818-4, *Short link chain for lifting purposes — Safety — Part 4: Chain slings — Grade 8*.

EN 818-5, *Short link chain for lifting purposes — Safety — Part 5: Chain slings — Grade 4*.

EN 1050:1996, *Safety of machinery — Principles of risk assessment*.

## 3 Terms and definitions

For the purposes of this part of EN 818 the definitions given in EN 818-1, EN 818-4 and EN 818-5 apply together with the following.

### 3.1

#### inspection

a visual check on the condition of the chain sling to identify obvious damage or deterioration which might affect its fitness for use

### 3.2

#### thorough examination

a visual examination carried out by a competent person, and where necessary, supplemented by other means, such as non-destructive testing, in order to detect damage or deterioration which might affect the fitness for use of the chain sling

## 4 Hazards

The release of a load due to failure of lifting accessories such as chain slings or their component parts puts at risk either directly or indirectly the safety or health of those persons within the danger zone of lifting equipment.

This part of EN 818 lays down those aspects of safe use associated with good practice.

Table 1 contains those hazards which require action to reduce risk identified by risk assessment as being specific or significant.

**Table 1 — Hazards and associated requirements**

Hazards identified in annex A of EN 1050:1996	Relevant clause of annex A of EN 292-2:1991/A1:1995	Relevant clause/subclause of this part of EN 818
26 Insufficient instructions for the driver/operator	<b>1.7.4</b> <b>3.6.3b)</b> <b>4.4.1</b>	5 and informative annex A 5 and informative annex A 5 and informative annex A

## 5 Safety requirements

### 5.1 General

Documented information shall be provided by the manufacturer covering the subjects listed in 5.2 to 5.6. Informative annex A contains guidance to assist in the preparation of this information.

### 5.2 Restriction on altering the finished condition on the chain sling

Any restrictions on alteration of the following shall be given:

- a) heat treatment;
- b) galvanizing (see also A.1.1.2.2.1);
- c) plating;
- d) coating.

### 5.3 Limitations on the use of the chain sling due to adverse environmental conditions or hazardous conditions

Any limitations on the use of the chain sling due to the following shall be given:

- a) adverse environments (see also A.1.1.2);
- b) hazardous conditions (see also A.1.1.3).

### 5.4 Actions to be taken before putting the chain sling into first use

Instructions shall be given regarding the following (see also A.1.2.1):

- a) the need to ensure the availability of the manufacturer's certificate;
- b) the need to enter full details of the chain sling in a record of lifting equipment;
- c) availability of instructions for use of the chain sling and information about adequate training of staff.

### 5.5 Instructions regarding correct use of the chain sling

Instructions regarding the following shall be provided:

- a) determination of the mass of the load, its centre of gravity, attachment points and the method of attachment;
- b) checking of the conformity of the method of lifting and mass of the load to the working load limit specified by the manufacturer for the working configuration;
- c) attachment of chain sling to hook of lifting machine;
- d) attachment of chain sling to load: direct attachment, choke hitch, basket hitch, special components;
- e) protection of chain sling and load;
- f) controlling rotation of load;
- g) ensuring even balance of the load;
- h) correct use of shortening devices;
- i) avoidance of shock loading;
- j) ensuring safety of personnel;
- k) correct fitting of load bearing pins in components according to the series of prEN 1677, if appropriate;
- l) correct use of clamping forces;
- m) use of less than the full number of legs;
- n) preparation of landing site;
- o) detachment of chain sling from load;
- p) correct storage of chain sling.

### 5.6 Periodic thorough examination and maintenance

Information shall be given regarding the following:

- a) withdrawal criteria;
- b) repairs, renewals, re-testing, certification;
- c) records of examination and maintenance.

## Annex A (informative)

### Guidance to assist the manufacturer to prepare documented information for the use and maintenance of chain slings

#### A.1 Use of chain slings

##### A.1.1 Chain sling selection

###### A.1.1.1 General

The relevant parts of EN 818 and EN 1677 define working load limit using the term General Lifting Service. This reflects the fact that lifting accessories can be and are used in a wide variety of circumstances in terms of configuration, types of load, methods of attachment. Design considerations and working load limit ratings are given in the relevant parts of EN 818 and EN 1677 take account of these circumstances.

EN 818-4 and EN 818-5 permit an alternative method of rating where a chain sling is to be used exclusively for a single specific lifting application where all of the circumstances of use are known.

###### A.1.1.2 Use in adverse environments

###### A.1.1.2.1 High and low temperature conditions

Care should be taken to take account of the maximum temperature which can be reached by the chain sling in service. This is difficult in practice but underestimation of the temperature involved should be avoided. Table A.1 summarizes the necessary variation in WLL due to temperature.

Chain slings of Grades 4 and 8 will not be adversely affected by temperatures down to  $-40^{\circ}\text{C}$  and no reduction from the working load limit is therefore necessary on this account. Where chain slings are to be used at temperatures below  $-40^{\circ}\text{C}$ , the manufacturer should be consulted.

###### A.1.1.2.2 Acidic conditions

###### A.1.1.2.2.1 Chain slings of Grade 8

Chain slings of Grade 8 should not be used either immersed in acid solutions or exposed to acid fumes. Attention is drawn to the fact that certain production processes involve acidic solutions and fumes and in these circumstances the manufacturer's advice should be sought.

For the same reasons, chain slings should not be galvanized or subjected to any plating processes without the approval of the manufacturer.

###### A.1.1.2.2.2 Chain slings of Grade 4

Chain slings of Grade 4 may be used in acidic conditions. The following precautions should be adopted:

- the working load of such a chain sling should not be greater than 50 % of the working load limit;
- the chain sling should be thoroughly washed in clean water immediately after use;
- the chain sling should be given an inspection by a competent person each day before use.

###### A.1.1.2.3 Conditions in which the chain sling is likely to be subjected to attack (chemical, abrasive etc.)

The manufacturer of the chain sling should be consulted, particularly if the chain sling is to be exposed to highly concentrated chemicals combined with high temperatures.

##### A.1.1.3 Use in exceptionally hazardous conditions

The rating of lifting accessories in European Standards assumes the absence of exceptionally hazardous conditions. Exceptionally hazardous conditions include offshore activities, the lifting of persons and lifting of potentially dangerous loads such as molten metals, corrosive materials or fissile materials. In such cases the degree of hazard should be assessed by a competent person and the working load limit adjusted accordingly.

Table A.1 — Variation in working load limit due to temperature<sup>1)</sup>

Grade	Working load expressed as a percentage of working load limit				
	Temperature, $t$ , $^{\circ}\text{C}$				
	$-40 < t \leq 200$	$200 < t \leq 300$	$300 < t \leq 400$	$400 < t \leq 475$	$t \geq 475$
4	100	100	75	50	Not permissible
8	100	90	75	Not permissible	

<sup>1)</sup> The use of chain slings within the permissible temperature ranges given in the table does not require any permanent reduction in working load limit when the chain is returned to normal temperatures. If chain slings reach temperatures in excess of the maximum permissible temperatures indicated in the table, they should be withdrawn from service and referred to the manufacturer.

### **A.1.2 Chain sling verification before first use and in service**

#### **A.1.2.1 Before first use**

Before first use of the chain sling it should be ensured that:

- a) the chain sling is precisely as ordered;
- b) the manufacturer's certificate is to hand;
- c) the identification and working load limit marking on the chain sling correspond to the information on the certificate;
- d) full details of the chain sling are recorded.

#### **A.1.2.2 Before each use**

Before each use the chain sling should be inspected for obvious damage or deterioration (see **A.2.1**). If faults are found during this inspection, the procedure given in **A.2.1** should be followed.

### **A.1.3 Handling the load**

#### **A.1.3.1 Preparation**

Attention should be given to any specific instructions provided for the handling of the load. Before starting the lift, it should be ensured that the load is free to move and is not bolted down or otherwise obstructed.

#### **A.1.3.2 Mass of the load**

It is essential that the mass of the load to be lifted is known. If the mass is not marked the information should be obtained from the consignment notes, manuals, plans etc. If such information is not available the mass should be assessed by calculation.

#### **A.1.3.3 Centre of gravity**

The position of the centre of gravity of the load should be established in relation to the possible points of attachment of the chain sling. To lift the load without it tilting or toppling the following conditions should be met.

- a) For single leg and endless chain slings the attachment point should be vertically above the centre of gravity.
- b) For two leg chain slings the attachment points should be either side of and above the centre of gravity.
- c) For three and four leg chain slings the attachment points should be distributed in plan around the centre of gravity. It is preferable that the distribution should be equal (but see **A.1.3.5**) and that the attachment points should be above the centre of gravity.

When using two-, three- and four-leg chain slings the attachment points and chain sling configuration should be selected to achieve angles between the chain sling legs and the vertical within the range marked on the chain sling. Preferably all angles to the vertical (angle  $\beta$  in Figure A.1) should be equal (but see **A.1.3.5**). Angles to the vertical of less than  $15^\circ$  should be avoided if possible as they present a significantly greater risk of load imbalance.

All multi-leg chain slings exert a horizontal component of force (see Figure A.1) which increases as the angle between the chain sling legs is increased. Where hooks or other fittings are threaded on a loop of chain, e.g. case chain slings and drum chain slings, the horizontal component of force is much greater and consequently the angle of such legs should not exceed  $30^\circ$  to the vertical. Care should always be taken to ensure that the load to be moved is able to resist the horizontal component of force without being damaged.


The hook to which the chain sling is attached should be directly above the centre of gravity.

#### **A.1.3.4 Method of connection**

A chain sling is usually attached to the load and the lifting machine by means of terminal fittings such as hooks and links. Chains should be without twists or knots. The lifting point should be seated well down in a hook, never on the point or wedged in the opening; the hook should be free to incline in any direction so as to avoid bending. For the same reason, the master link should be free to incline in any direction on the hook to which it is fitted.

The chain may be passed under or through the load to form a choke hitch (see Figure A.2) or basket hitch (see Figure A.3). Where it is necessary, due to the danger of the load tilting, to use more than one chain sling leg in a basket hitch, this should preferably be done in conjunction with a lifting beam.

When a chain sling is used in a choke hitch, the chain should be allowed to assume its natural angle and should not be hammered down.

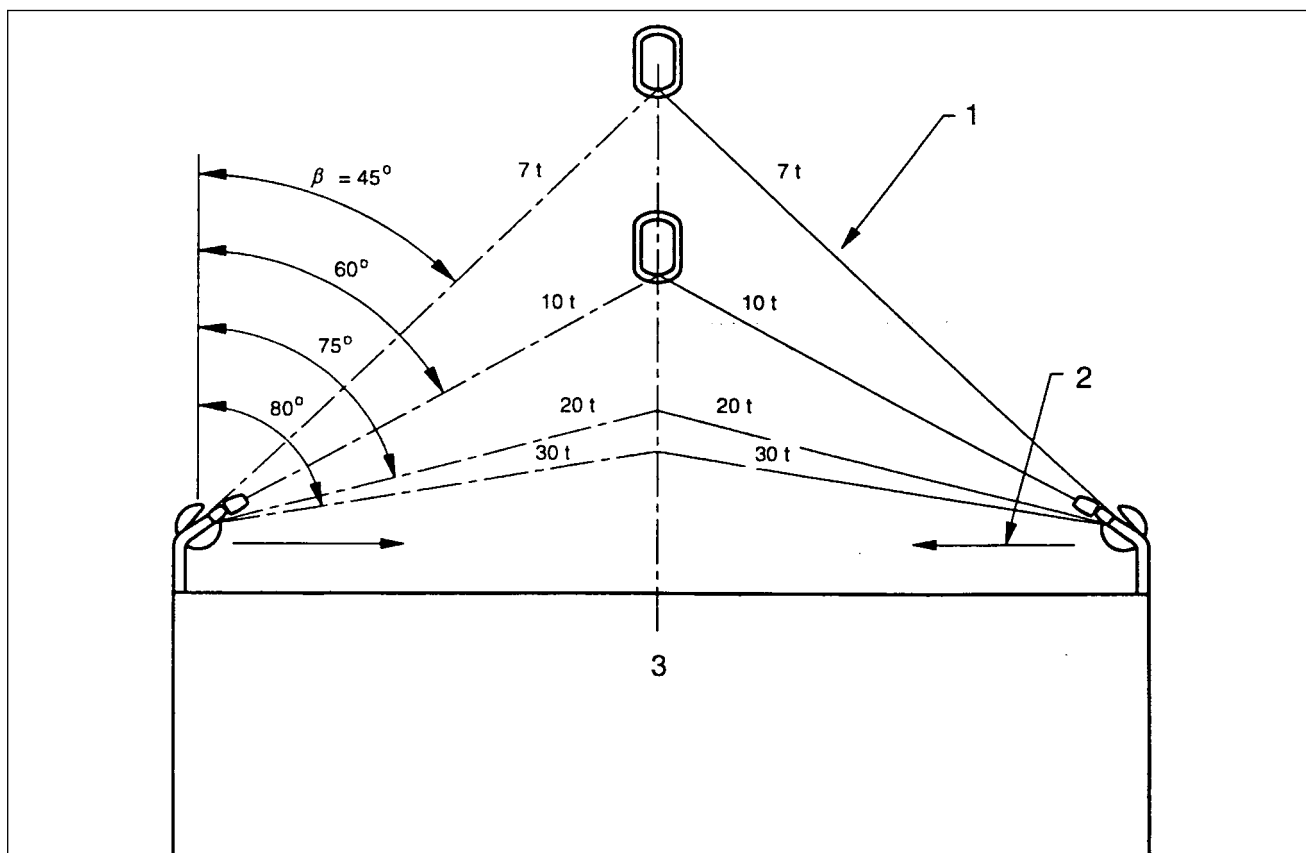

1. Loading of leg
2. Horizontal component of force
3. Load 10 t

The hatched area indicates angles greater than  $60^\circ$  to the vertical at which chain slings should never be used.

**Figure A.1 — Variation of chain sling leg loading with leg angle for a load of 10 t**

Chain sling legs may be attached to the load in several ways.

a) *Straight leg*

In this case, lower terminals are connected directly to the attachment points. Selection of hooks and attachment points should be such that the load is carried in the seat of the hook and tip loading of the hook is avoided. In the case of multi-leg chain slings hook tips should point outwards unless the hooks are specifically designed to be used otherwise.

b) *Choke hitch*

In this case, chain sling legs are passed through or under the load and the lower terminal back hooked or reeved onto the chain (see Figure A.2).

This method can, therefore be used where no suitable attachment points are available and has the additional advantage that the chain sling legs tend to bind the load together.

Where choke hitch is employed the working load limit (WLL) of the chain sling should be no more than 80 % of that marked.

c) *Basket hitch*

The chain sling is passed through or under the load as in b) but in this case the lower terminals are connected directly to the master link or to the hook of the lifting machine. Generally this method requires two or more chain sling legs and should not be used for lifting loads which are not held together. Where the load geometry permits, a single leg chain sling can be used provided that the chain sling passes through the load directly above the centre of gravity of the load. Examples of basket hitches are given in Figure A.3.

d) *Wrap and choke or wrap and basket hitch*

These methods are adaptations of b) and c), designed to provide extra security of loose bundles and involve taking an extra loop of chain completely around the load.

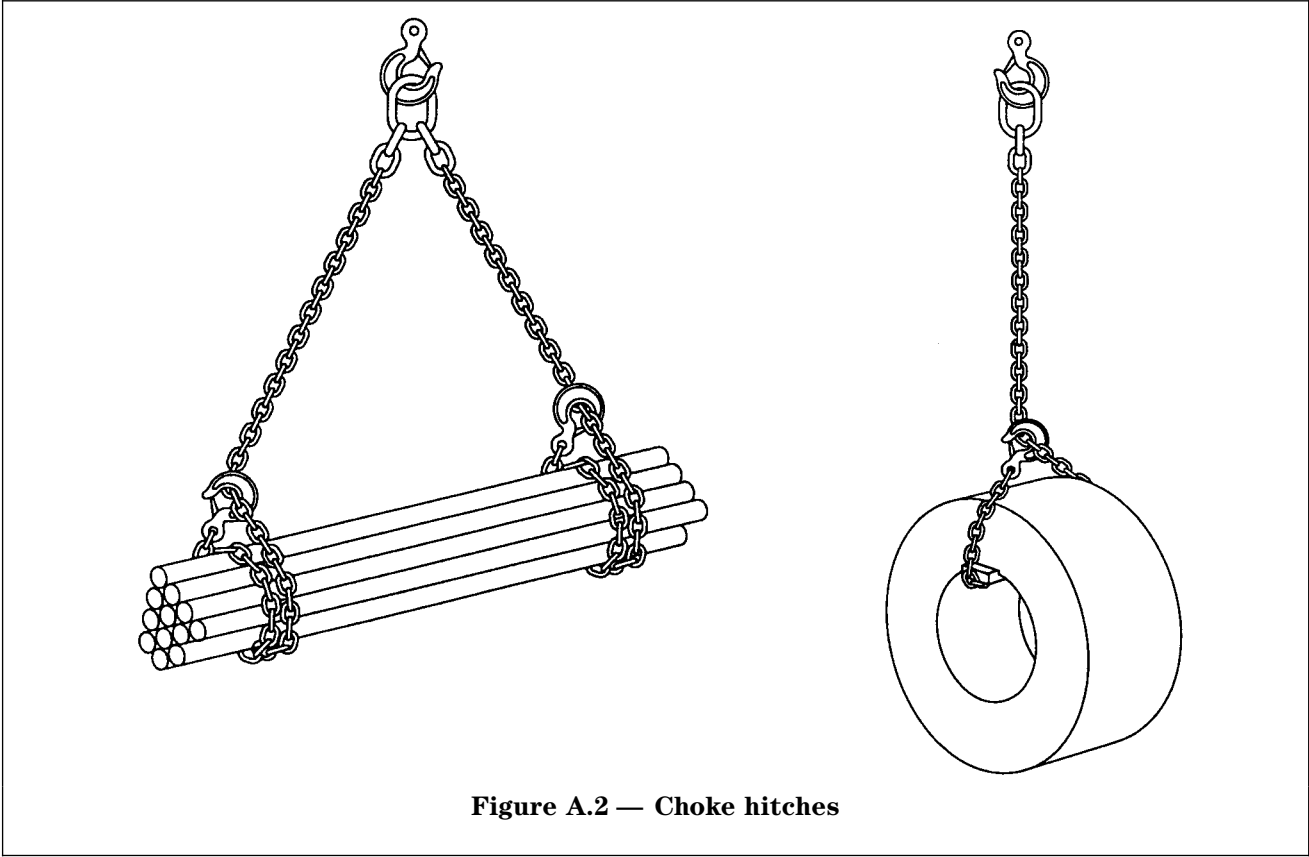


Figure A.2 — Choke hitches

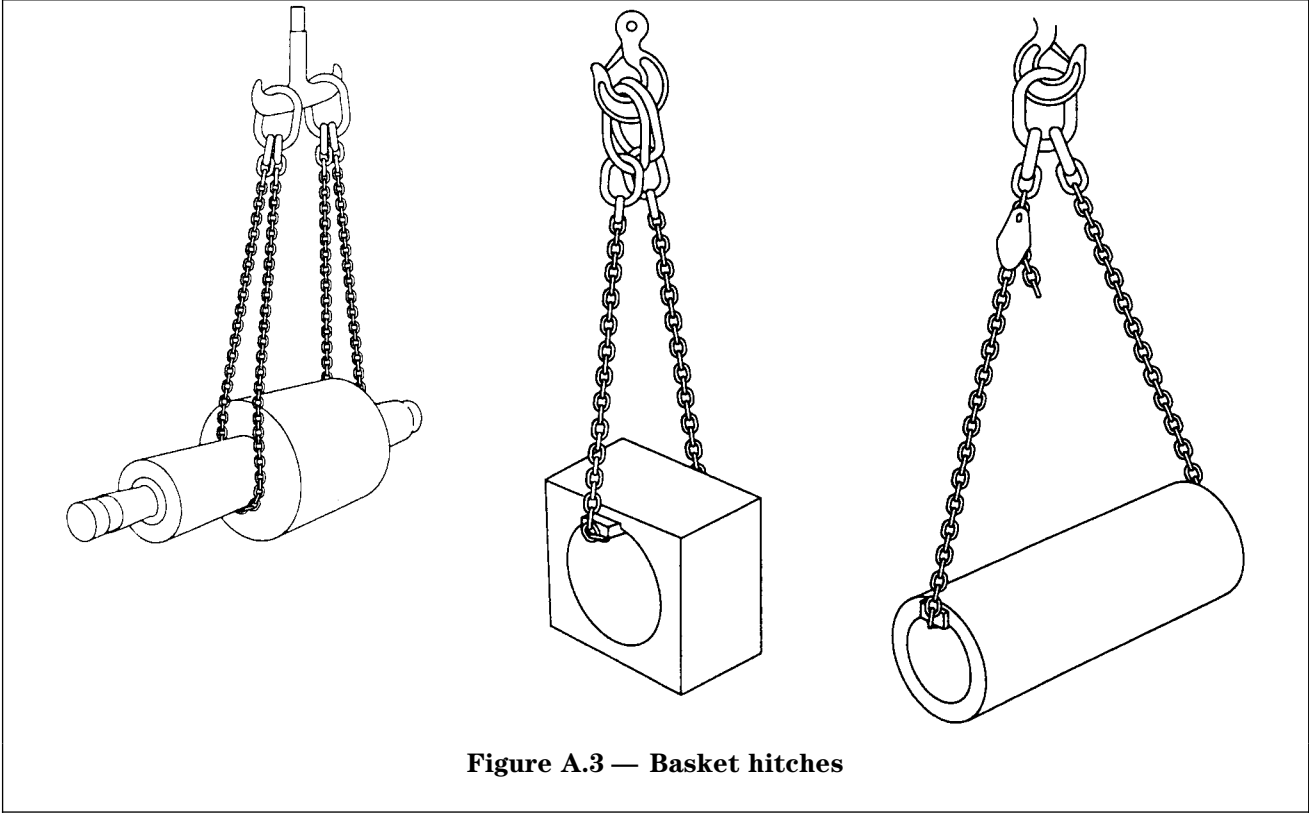


Figure A.3 — Basket hitches

If two or more chain sling legs are used in a choke hitch or a wrap and choke hitch care should be taken:

- a) if it is important to avoid imparting a torque to the load, to align the chokes; or
- b) if it is important to avoid the load rolling or moving laterally when first lifted, to ensure that (at least) one leg passes either side of the load.

Packing may be required where a chain comes into contact with a load in order to protect either the chain or the load or both, since sharp corners of hard material may bend or damage the chain links or, conversely, the chain may damage the load because of high contact pressure. Packing, such as wooden blocks, may be used to prevent such damage.

In order to prevent dangerous swaying of the load and to position it for loading, a tag line is recommended.

When loads are accelerated or decelerated suddenly, high dynamic forces occur which increase the stresses in the chain. Such situations, which should be avoided, arise from snatch or shock loading e.g. from not taking up the slack chain before starting to lift or by the impact of arresting falling loads.

#### **A.1.3.5** *Symmetry of loading*

In EN 818-4 and prEN 818-5 working load limits are given for chains slings of Grades 8 and 4 in a range of sizes and for different configurations. These WLL values have been determined on the basis that the loading of the chain sling is symmetrical. This means that when the load is lifted the chain sling legs are symmetrically disposed in plan and subtend the same angles to the vertical (see Figure A.4).

In the case of three leg chain slings, if the legs are not symmetrically disposed in plan the greatest tension will be in the leg where the sum of the plan angles to the adjacent legs is greatest. The same effect will occur in 4 leg chain slings except that the rigidity of the load should also be taken into account, with a rigid load the majority of the mass may be taken by only three or even two legs with the remaining leg or legs serving only to balance the load (see Figure A.5).

In the case of two-, three- and four-leg chain slings, if the legs subtend different angles to the vertical the greatest tension will be in the leg with the smallest angle to the vertical. In the extreme case, if one leg is vertical, it will carry all the load (see Figure A.5).

If there is both a lack of symmetry in plan and unequal angles to the vertical the two effects will combine and may either be cumulative or tend to negate each other (see Figure A.5).

The loading can be assumed to be symmetric if all of the following conditions are satisfied:

- a) the load is less than 80 % of marked WLL; and
- b) chain sling leg angles to the vertical are all not less than 15°; and
- c) chain sling leg angles to the vertical are all within 15° to each other; and
- d) in the case of three- and four-leg chain slings, the plan angles are within 15° of each other.

If all of the above parameters are not satisfied then the loading should be considered as asymmetric and the lift referred to a competent person to establish the safe rating for the chain sling. Alternatively, in the case of asymmetric loading, the chain sling should be rated at half the marked WLL (see Figure A.5).

If the load tends to tilt, it should be lowered and the attachments changed. This can be accomplished by re-positioning the attachment points or by using compatible shortening devices in one or more of the legs. Such shortening devices should be used in accordance with the manufacturer's instructions.

#### **A.1.3.6** *Safety of lift*

Hands and other parts of the body should be kept away from the chain to prevent injury as the slack is taken up. When ready to lift, the slack should be taken up until the chain is taut. The load should be raised slightly and a check made that it is secure and assumes the position intended. This is especially important with basket or other loose hitches where friction retains the load. Reference should also be made to ISO 12480-1 for planning and management of the lifting operation and the adoption of safe systems of working.


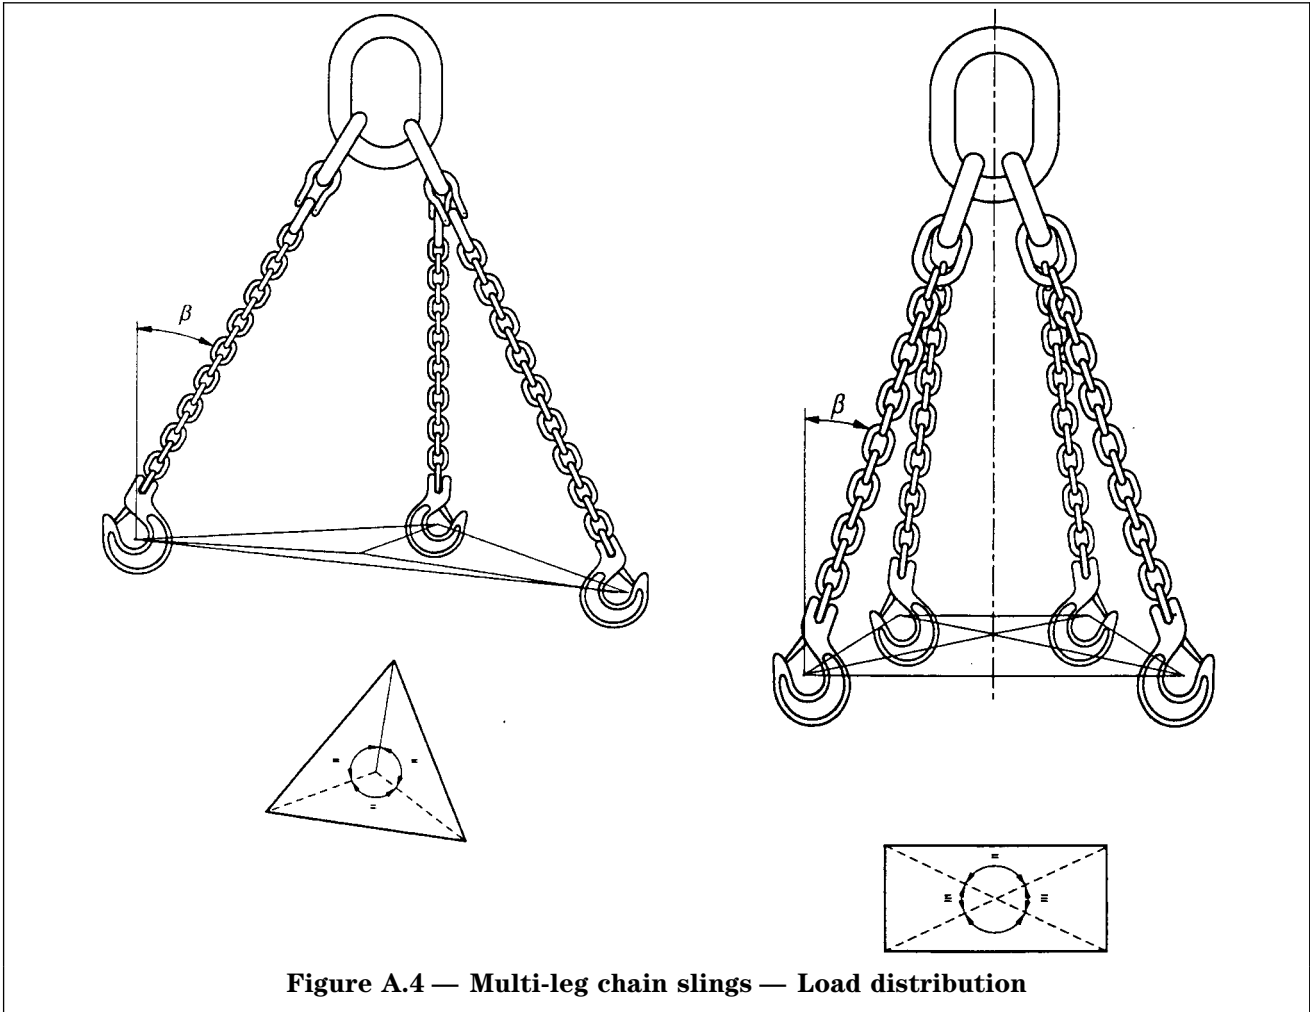


Figure A.4 — Multi-leg chain slings — Load distribution

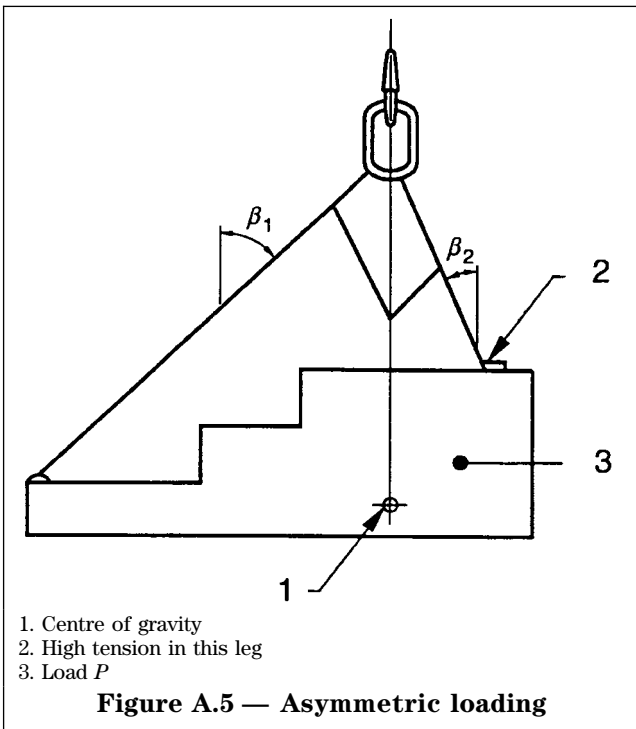

- 1. Centre of gravity
- 2. High tension in this leg
- 3. Load  $P$

Figure A.5 — Asymmetric loading

**A.1.3.7 Multi-legs chain slings with less than the full number of legs in use**

As a general principle, chain slings should be used only for the purpose for which they have been designed. In practice, however, occasions may arise when a lift needs to be made using a smaller number of legs than the number of legs in the chain sling. In such cases the WLL should be reduced from that marked on the chain sling by applying the relevant factor given in Table A.2.

Legs that are not in use should be hooked back to reduce the risk of such legs swinging freely, or snagging when the load is moved.

**Table A.2 — Working load limit (WLL) factors**

Types of chain sling	Number of legs used	Factor to apply to marked WLL
two-leg	1	1/2
three- and four-leg	2	2/3
three- and four-leg	1	1/3

**A.1.3.8 Working load limit (WLL)**

Taking into consideration A.1.3.1 to A.1.3.7 and the cumulative effects of de-rating, the method of chain slinging should be decided and a suitable chain sling or chain slings selected, having a WLL equal to or greater than the mass to be lifted.

**A.1.3.9 Landing the load**

The landing site should be prepared. It should be ensured that the ground or floor is of adequate strength to take the weight taking account of any voids, ducts, pipes etc. which may be damaged or collapse. It should also be ensured that there is adequate access to the site and that it is clear of any unnecessary obstacles and people. It may be necessary to provide timber bearers or similar material to avoid trapping the chain sling or to protect the floor or load or to ensure the stability of the load when landed.

The load should be landed carefully. Care should be taken to avoid trapping the chain sling beneath the load as this may damage it. Before allowing the chain to become slack, the load should be checked to ensure that it is properly supported and stable. This is especially important when several loose objects are in basket hitch and choke hitch. When the load is safely landed the chain sling should be removed by hand. The chain sling should not be dragged out with the lifting machine since it may thereby be damaged or it may snag and cause the load to topple over. The load should not be rolled off the chain sling as this may damage the chain sling.

**A.1.3.10 Storage of chain slings**

When not in use, chain, slings should normally be kept on a properly designed rack. They should not be left lying on the ground where they may be damaged.

If the chain slings are to be left suspended from a crane hook, the chain sling hooks should be engaged in an upper link to reduce the risk of chain sling legs swinging freely or snagging.

If it is likely that chain slings will be out of use for some time they should be cleaned, dried and protected from corrosion, e.g. lightly oiled.

**A.2 Maintenance**

**A.2.1 Inspection**

During service, chain slings are subjected to conditions which affect their safety. It is necessary therefore to ensure, as far as is reasonably practicable, that the chain sling should be safe for continued use.

If the tag or label identifying the chain sling and its working load limit becomes detached and the necessary information is not marked on the master link itself, or by some other means, the chain slings should be withdrawn from service.

The chain sling should be withdrawn from service and referred to a competent person for thorough examination if any of the following are observed:

- a) the chain sling markings are illegible, i.e. information on the chain sling identification and/or the working load limit;
- b) distortion of the upper or lower terminals;
- c) chain stretch;

If the chain links are elongated or if there is any lack of free articulation between the links or noticeable difference in the leg length of multi-leg chain slings, the chain may have been stretched.

- d) wear;

Wear by contact with other objects usually occurs on the outside of the straight portions of the links where it is easily seen and measured. Wear between adjoining links is hidden. The chain should be slack and adjoining links rotated to expose the inner end of each link. Inter-link wear, as measured by taking the diameter indicated ( $d_1$ ) and one at right angles, ( $d_2$ ) may be tolerated until the mean of these diameters has been reduced to 90 % of the nominal diameter ( $d_n$ ) (see Figure A.6) provided .

$$\frac{d_1 + d_2}{2} \geq 0,9 d_n$$

- e) cuts, nicks, gouges, cracks, excessive corrosion, heat discoloration, bent or distorted links or any other defects;
- f) signs of “opening out” of hooks, i.e. any noticeable increase in the throat openings or any other form of distortion in the lower terminal.

The increase in throat opening should not exceed 10 % of the nominal value or be such as to allow the safety hatch, if fitted, to become disengaged.

### A.2.2 Thorough examination

A thorough examination should be carried out by a competent person at intervals not exceeding twelve months. This interval should be less where deemed necessary in the light of service conditions.

Records of such examinations should be maintained.

Chains slings should be thoroughly cleaned so as to be free from oil, dirt and rust prior to examination. Any cleaning method which does not damage the parent metal is acceptable. Methods to avoid are those using acids, overheating, removal of metal or movement of metal which may cover cracks or surface defects.

Adequate lighting should be provided and the chain sling should be examined throughout its length to detect any evidence of wear, distortion or external damage.

### A.2.3 Repair

Any replacement component or part of the chain sling should be in accordance with the appropriate European Standard for that component or part.

With Grade 8 or Grade 4 chain slings, if any chain link within the leg of a chain sling is required to be replaced then the whole of the chain within that leg should be renewed.

The repair of chain in a welded chain slings should only be carried out by the manufacturer using a resistance butt or flash butt welding process.


Components that are cracked, visibly distorted or twisted, severely corroded or have deposits which cannot be removed should be discarded and replaced.

Minor damage such as nicks and gouges may be removed by careful grinding or filing. The surface should blend smoothly into the adjacent material without abrupt change of section. The complete removal of the damage should not reduce the thickness of the section at that point to less than the manufacturers specified minimum dimensions or by more than 10 % of nominal thickness of the section.

In the case of chain slings on which repair work has involved welding, each repaired chain sling should be proof-tested following heat treatment using a force equivalent to twice the working load limit and thoroughly examined before it is returned to use.

However, where repair is carried out by inserting a mechanically assembled component, proof-testing is not required providing that the component has already been tested by the manufacturer in accordance with the relevant European Standard.

The accuracy of the tensile test equipment should be of class 2 as given in EN 10002-2.

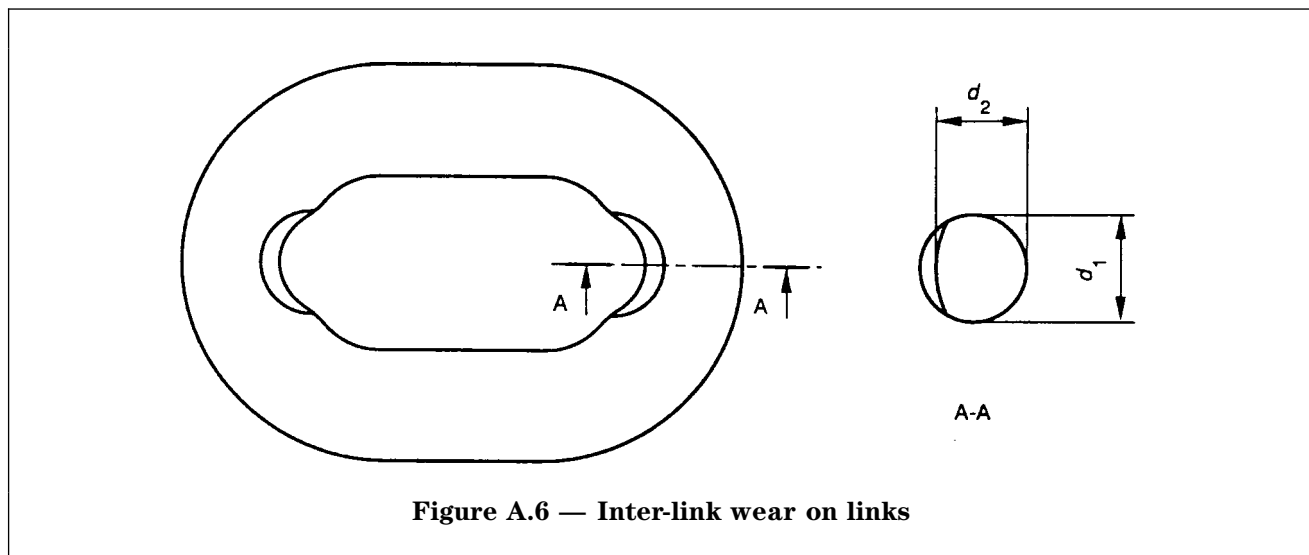

## Annex B (informative)

### Bibliography

- prEN 1677-1, *Components for slings — Safety — Part 1: Forged steel components — Grade 8.*
- prEN 1677-2, *Components for slings — Safety — Part 2: Forged steel lifting hooks with latch — Grade 8.*
- prEN 1677-3, *Components for slings — Safety — Part 3: Forged steel self-locking hooks — Grade 8.*
- prEN 1677-4, *Components for slings — Safety — Part 4: Links — Grade 8.*
- prEN 1677-5, *Components for slings — Safety — Part 5: Forged steel lifting hooks with latch — Grade 4.*
- prEN 1677-6, *Components for slings — Safety — Part 6: Links — Grade 4.*
- EN 10002-2:1991, *Metallic materials — Tensile testing — Part 2: Verification of the forces measuring system of the tensile testing machine.*
- ISO 12480-1, *Cranes — Safe use — Part 1: General.*

## Annex ZA (informative)

### Relationship of this European Standard with EU Directives

This European Standard has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports the essential requirements of EU Directives. Machinery Directive 98/37/EC.

WARNING. Other requirements and other EU Directives may be applicable to the product(s) falling within the scope of this standard.

Compliance with this standard provides one means of conforming with the specific essential requirements of the Directive concerned and associated with EFTA requirements.

---

---

## **BSI — British Standards Institution**

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

### **Revisions**

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: 020 8996 9000. Fax: 020 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

### **Buying standards**

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: 020 8996 9001. Fax: 020 8996 7001.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

### **Information on standards**

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre. Tel: 020 8996 7111. Fax: 020 8996 7048.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: 020 8996 7002. Fax: 020 8996 7001.

### **Copyright**

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

If permission is granted, the terms may include royalty payments or a licensing agreement. Details and advice can be obtained from the Copyright Manager. Tel: 020 8996 7070.